





Copper Braided Strip (Tinned/Untinned)

Material Properties :

Width (mm) ± 2 mm	No. of Bundles x No. of Wires	Total No. of Wires ± 10	Wire Diameter mm ± 0.003	Normal Cross Sectional Area (mm ²) ± 3 mm ²
10*	24 x 10	240	.19	6.8
12*	24 x 14	336	.19	9.53
16	24 x 24	576	.19	16.3
20	24 x 30	720	.19	20.4
25	48 x 15	720	.19	20.4
25	48 x 20	960	.19	27.2
30	48 x 24	1152	.19	32.6
35	48 x 30	1440	.19	40.8
40	48 x 36	1728	.19	49.0
35	48 x 28	2496	.19	70.73
	48 x 24			
40	48 x 36	3360	.19	95.21
	48 x 32			
	24x 17	408	.19	11.6

* Untinned (Bare Copper Braid)

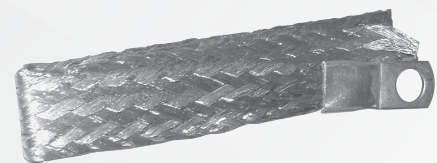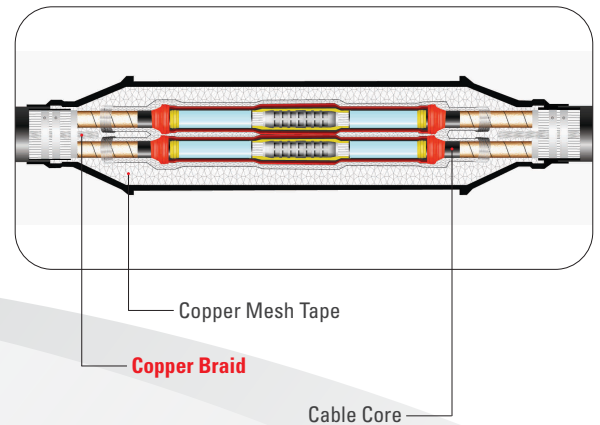

40
Years of
Experience

35
Countries
Global
Presence

200
Plus Skilled
Manpower

4
World Class
Manufacturing
Facilities

50
Internationally
Approved
Products